



Helpful Hints 0002

clear & easy

201 INDUSTRIAL BOULEVARD • KEARNEYSVILLE, WV 25430
Phone: (304) 728-7056 • Fax: (304) 725-6579 • Toll Free: (800) 931-9214

PAGE: 1 of 1

DATE: 6-18-02

REVISION: 03

SUBJECT: Fluorescent Bulb Removal

MODELS: GIII Marketing Venders

of People
Required



TOOLS REQUIRED

None

ESTIMATED TIME

2 minutes



The following areas of this vender contain voltage, which can cause serious injury or even death. The main power cord, supplying 110 VAC to the evaporator, EMI filter, and refrigeration system. The power line from the EMI filter to the ballast and transformer. The ballast can produce upwards of 600 volts. Remove power from vender before working in any of these areas.

Reason for Hint: To show the correct way to remove a fluorescent bulb from a marketing vender.

Instructions: *caution:* The fluorescent bulb and lamp bracket may be hot, it is recommended to let them cool by cutting off power to the ballast before removing the bulb.


TO REMOVE A SHORT BULB IN A MARKETING VENDER:

1. Unplug vender or ballast.
2. Use your fingers to depress the top lamp "plunger" socket, then pull up slightly on the bulb to dislodge it from the bottom lamp socket. Move the top portion of the bulb behind the top lamp bracket (away from you) and carefully pull the bulb out of the bottom area of the door frame.

Note: If the water diverter is in your way, pull it forward to create more space then return it to its proper position when finished.

TO REMOVE A LONG BULB IN A MARKETING VENDER:

1. Unplug vender or ballast.
2. Push up on bulb to release it from the bottom lamp socket. This will allow you to reposition the bottom of the bulb so that it drops below the bottom lamp bracket.
3. Once the bulb is cleared from both lamp brackets, carefully remove the bulb from the top area of the door frame.

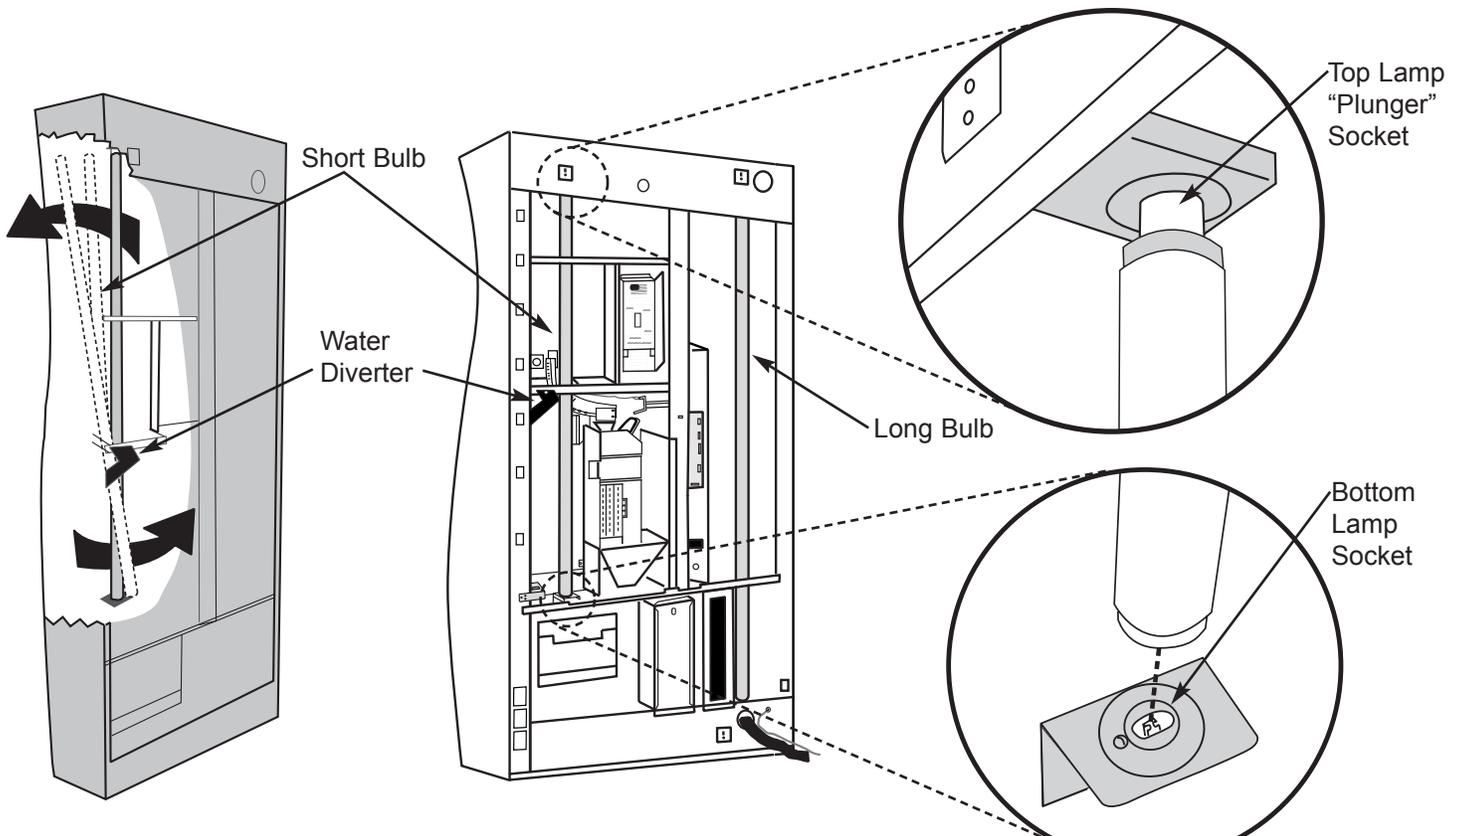

**ANY QUESTIONS??? CONTACT ROYAL VENDORS' CUSTOMER SERVICE DEPARTMENT
CALL TOLL FREE (800) 931-9214**